

## Standard Features

- ◆ Heavy gauge aluminum headboards with stainless steel liners and hand-sewn metal slide(s) depending on application.
- ◆ Woven racing sails are cross-cut using Contender, Dimension/Polyant and Bainbridge fabrics
- ◆ Boats over 30ft (9.1mt) l.o.a. are fitted with a two ply head and clew
- ◆ Luff and foot attachments (if needed) attached with hand-sewn webbing.
- ◆ Reef rings are stainless steel pressed rings with webbing load straps, tack reefs equipped with dual "dogbone" stainless steel rings.
- ◆ Corner rings are webbed Stainless Steel external rings.
- ◆ Batten pockets finished with our Internal Velcro system.
- ◆ Shelf or loose foot, Flattener and Cunningham
- ◆ All seams will have 1 to 3 rows of 3-step stitching, depending on application.
- ◆ Sails include; 2-3 sets of draft stripes, numbers, and insignia
- ◆ Patches are "fan" type radial.
- ◆ Kevlar or Spectra "up and over" leechline on boats over 30ft
- ◆ Tell-tales at each batten pocket.
- ◆ Dimensions maximized at all girth stations.
- ◆ Zipper sausage sailbag.

## Optional Features

- ◆ One or more reefing points.
- ◆ Full length battens.
- ◆ Seamkote.

## Quality, Service, Value



- ◆ High performance racing sails come with a two year warranty on materials and workmanship.
- ◆ If you ever need service, our consultants will direct you to the nearest of our worldwide network of Service lofts.
- ◆ No matter where in the world your sailing takes you, we are there to help.
- ◆ For further information, contact your Neil Pryde consultant by dialing 1-203-874-6984 or <http://www.neilprydesails.com>

*Drawings and type may describe features not applicable to all sizes of sails. Our ongoing development program may change features and specifications without notice.*

*Copyright Neil Pryde Sails Int. 2002 17-OCT-01*



*Super strong double aluminum headboards featuring hand sewn metal slides (if n*

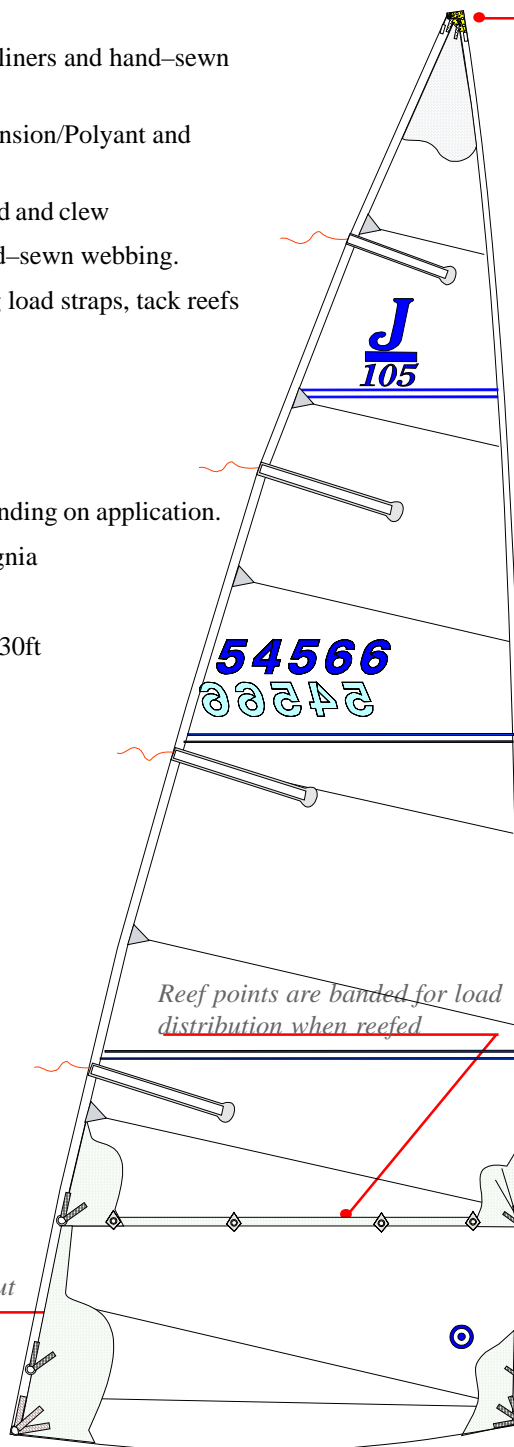

*Reef Dogbones*